

Visor Electrónico **Vix 300**

Características Técnicas.

Display LED números rojos con 5 dígitos de 300 mm.

Carcasa de aluminio ligero pintado al horno

Temperatura de trabajo: desde -20 a 70°C

IP 50

Apantallamiento contra interferencias

Alimentación mediante corriente 48Vac

ó 90/240Vac

Visor de máxima visibilidad y prestaciones

Indicador especialmente diseñado y

fabricado para su uso en los

nuevos sistemas estáticos y dinámicos


de pesaje en ambientes industriales.

Entrada de sensor en mV.

Peso total 12 kg



Fabricación nacional con control metrológico acreditado nº 01M042

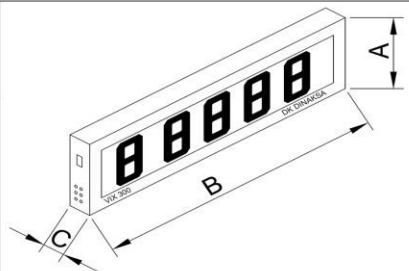	A	B	C
	420	1500	115



Opciones



Visera protectora



Mando infrarrojo para las funciones OFF, TARA, memoria sumadora, totalizador y borrados

Mando vía radio para las funciones OFF, TARA, memoria sumadora, totalizador y borrados

Alimentación mediante 24Vdc

Entrada analógica 4-20mA ó 0-10V

Salida analógica 4-20mA ó 0-10V

Salida tipo PROFIBUS DP

Salida Ethernet / Wifi / Vía radio

Salida RS232 / RS485


Preselección de carga (incluye mando)

Pico máximo

Certificado de calibración (a petición)

Otras IP, consultar

Consúltenos sus necesidades específicas

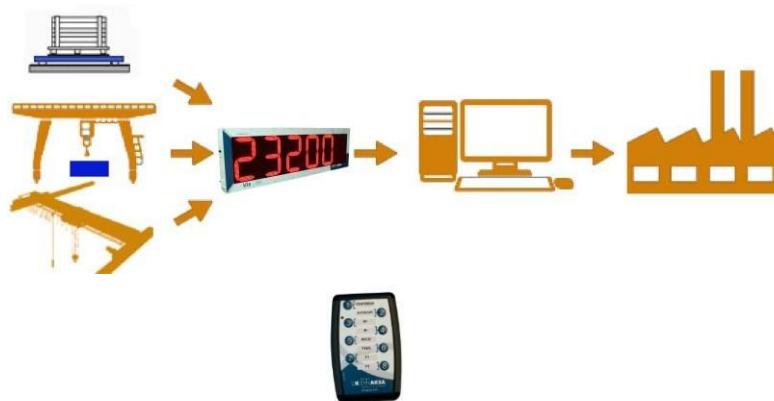

Dinaksa Pesaje Industrial S.L.U. se reserva el derecho de modificar las especificaciones técnicas del producto sin previo aviso

www.dinaksa.com

dinaksa@dinaksa.com

t: (+34) 946 713 222*



Vix 300

VERSIÓN: 01-02-2017

f: (+34) 946 713 703

Electronic Display **Vix 300**

TECHNICAL FEATURES

Display with 5 Red LED digits 300 mm. high.

Oven-painted lightweight aluminum housing.

Working temperature: -20°C to 70°C.

IP 50

Screening against interference.

Current power supply: 48 Vac or 90/240 Vac.

Maximum visibility and high-performance display, specially designed and produced for use in static and dynamic weighing systems in industrial environments.

Sensor input in mV.

Weight 12 Kg



National manufacturing with accredited metrological control No. 01M042



	A	B	C
	420	1500	115

OPTIONS



Protective visor.

Infrared remote control for the OFF, TARE, adding memory, totalizer and delete functions.

Via Radio remote control for the OFF, TARE, adding memory, totalizer and delete functions.

Power supply 24 Vdc.

Analog input 4-20 mA or 0-10V.

Analog output 4-20 mA or 0-10V.

PROFIBUS DP type output.

Ethernet / Wifi / via Radio output.

RS232 / RS485 output.

Load preselection (includes a remote control).

Maximum peak indicator.

Other IP protection levels, on request

Calibration Certificate (on request).

Contact us for your specific needs.

